


Industrial loudspeakers

IMCOS 5242



Page 45

IMCOS 5253



Page 45

IMCOS 6801



Page 45

IMCOS 6811



Page 46

IMCOS 6899



Page 46

DB14



Page 46

Eaton's range of safe area loudspeakers are manufactured from materials including steel, aluminium and plastic. They also include a variety of mounting options, suitable for multiple applications.


Industrial loudspeakers

IMCOS 5242

Industrial loudspeaker



Area classification	Industrial
Approvals	ABS, BV, DNV, GL, LR, RINA, Chinese classification societies
Operating temperature	-25°C to +90°C
Ingress protection	IP22
Material	Aluminium
Entries	Prewired cable
Weight	1.5kg
Sound output	Sensitivity (1W, 1m): 97dB (±3dB)
Transformer	100V
Wattage & transformer tappings	6W: 6.0, 3.0, 2.0, 1.5, 0.8, 0.5

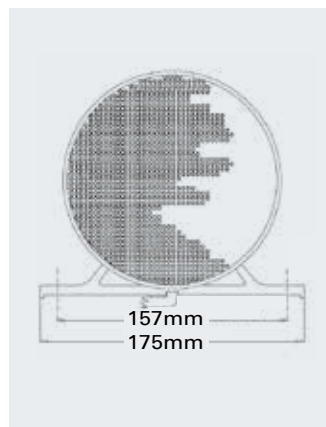


IMCOS 5253

Weatherproof loudspeaker



Area classification	Weatherproof
Approvals	ABS, BV, DNV, GL, LR, RINA, Chinese classification societies
Operating temperature	-25°C to +90°C
Ingress protection	IP56
Material	Polycarbonate
Entries	2 x PG13
Weight	0.8kg*
Sound output	Sensitivity (1W, 1m): 88dB (±3dB)
Transformer	100V
Wattage & transformer tappings	10W: 10.0, 5.0, 3.5, 2.5, 1.5, 0.8
Low impedance	8Ω

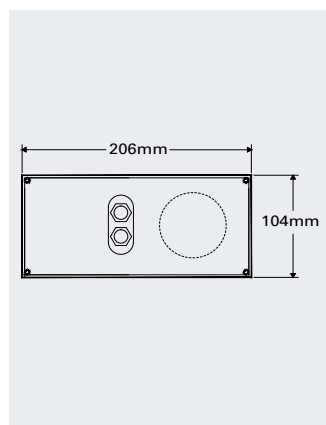


IMCOS 6801

Industrial loudspeaker



Area classification	Industrial
Approvals	ABS, BV, DNV, GL, LR, RINA, Chinese classification societies
Operating temperature	-25°C to +70°C
Ingress protection	IP22
Material	Aluminium/steel*
Entries	2 x M20
Weight	1.0kg
Sound output	Sensitivity (1W, 1m): 92dB (±3dB)
Transformer	100V
Wattage & transformer tappings	6W: 6.0, 3.0, 2.0, 1.5, 0.8, 0.5
Low impedance	8Ω

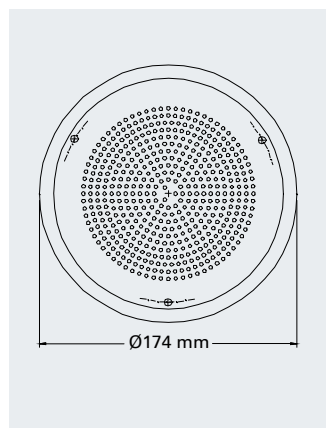

*Model dependent


Industrial loudspeakers

IMCOS 6811

Weatherproof loudspeaker



Area classification	Weatherproof
Approvals	ABS, BV, DNV, GL, LR, RINA, Chinese classification societies
Operating temperature	-50°C to +90°C
Ingress protection	IP66
Material	Plastic
Entries	2 x PG16
Weight	1.3kg
Sound output	Max at full power (30W, 1m): 119dB (±3dB)
Transformer	100V
Wattage & transformer tapings	30W: 30.0, 15.0, 10.0, 5.0, 2.5, 1.5
Low impedance	8Ω

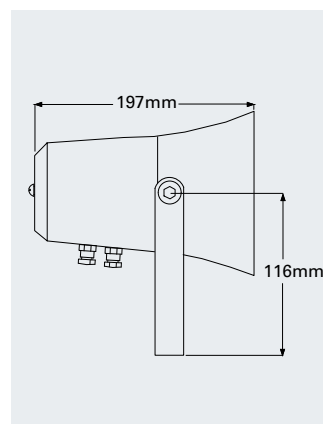


IMCOS 6899

Weatherproof loudspeaker



Area classification	Weatherproof
Approvals	ABS, BV, DNV, GL, LR, RINA, Chinese classification societies
Operating temperature	-25°C to +90°C
Ingress protection	IP55
Material	ABS
Entries	Prewired cable
Weight	0.35kg
Sound output	Max at full power (1.5W, 1m): 92dB (±3dB)
Transformer	100V
Wattage & transformer tapings	1.5W

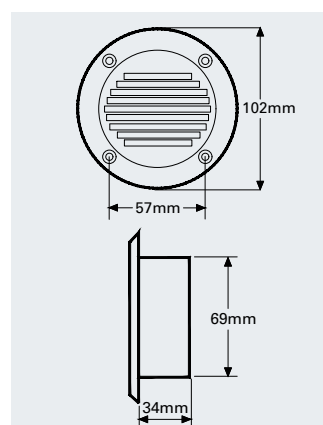


DB14

Weatherproof loudspeaker



Area classification	Weatherproof
Operating temperature	-55°C to +70°C*
Ingress protection	IP66 & IP67
Material	Corrosion free GRP
Entries	2 x M20
Weight	2.6kg
Output	Sensitivity (1W, 1m): 107dB (±3dB) Max at full power (15W, 1m): 117dB (±3dB)
Transformer	100V
Wattage & transformer tapings	15W: 15.0, 7.5, 5.0, 4.0, 2.0, 0.8*
Low impedance	8Ω*
Options	Tag & duty labels, colour

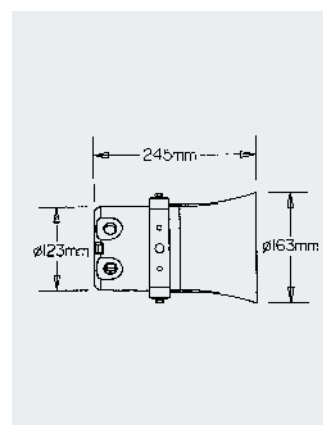

*Model dependent