

Industrial telephones and accessories

ResistTel



Page 65

ResistTel MB



Page 65

ResistTel IP



Page 65

FernTel



Page 66

FernTel IP



Page 66

VoIP InduTel



Page 66

InduTel



Page 66

FernTel W & W ZB



Page 67

IntellyCom station



Page 67

TAR 21 Call relay



Page 67

AWS signalling



Page 67

Protection housing



Page 68

Protection hoods



Page 68

WP Twin LED



Page 68

Secondary telephone bell



Page 68


Industrial telephones and accessories

ResistTel

Weatherproof robust telephone



Certification	Weatherproof
Operating temperature	-25°C to +60°C T5
Ingress protection	IP66
Material	Corrosion-free GRP
Weight	5.5kg
Options	Body colour, keypad & display, accessories; headset, earpiece, loudspeaker set, TWIN sounder/beacon, protection hood, secondary sounder

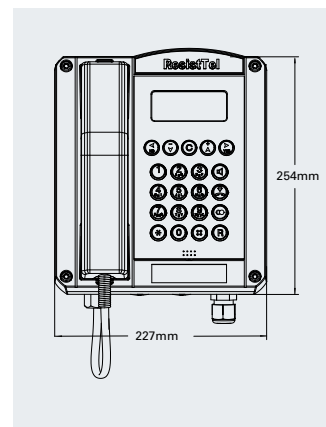


ResistTel MB

Weatherproof robust telephone



Certification	Weatherproof
Operating temperature	-25°C to +60°C
Ingress protection	IP66
Material	Corrosion-free GRP
Weight	5.5kg
Options	Accessories

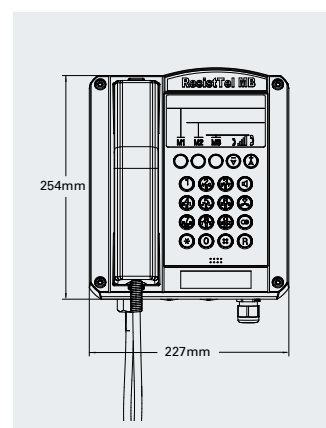


ResistTel IP

Weatherproof IP telephone



Certification	Weatherproof
Operating temperature	-40°C to +70°C
Ingress protection	IP66
Material	Corrosion-free GRP
Weight	5kg
Protocol	H.323, SIP, TSIP, SIPS
Power supply	Power over Ethernet
Options	Body colour, spiral cord/armoured cord, stabiliser bracket, relay, 2nd Lan

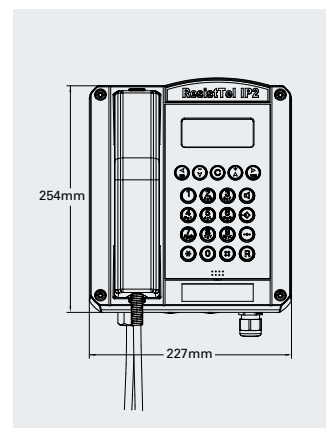


Industrial telephones and accessories

FernTel

Weatherproof wall and desk telephone



Certification	Weatherproof
Operating temperature	-20°C to +55°C
Display:	-10°C to +55°C
Ingress protection	IP65
Material	Polycarbonate
Entries	Up to 2 x M20 and 2 x M25
Weight	2.3 Kg
Options	Body colour, spiral cord/armoured cord, stabiliser bracket




FernTel IP

Weatherproof wall and desk IP telephone



Certification	Weatherproof
Operating temperature	-20°C to +60°C
Ingress protection	IP65
Material	Polycarbonate
Weight	2.34kg approx
Protocol	H.323, SIP, TSIP, SIPS
Power supply	Power over Ethernet
Options	Body colour, spiral cord/armoured cord, stabiliser bracket




VoIP InduTel wall telephone

IP telephone with protection door



Area classification	Weatherproof
Operating temperature	-40°C to +55°C
Ingress protection	IP66
Material	Polycarbonate
Weight	2.3kg approx
Protocol	SIP
Power supply	Power over Ethernet
Options	Housing colour




Analogue InduTel wall telephone

Weatherproof telephone with protection door



Certification	Weatherproof
Operating temp	-25°C to +55°C
Ingress protection	IP66
Material	Polycarbonate
Weight	2.3kg approx
Options	Keypad, transparent door, optical call indicator




Industrial telephones and accessories

FernTel W and FernTel W ZB

Built in telephone



Area classification	Weatherproof
Operating temp	-25°C to +60°C
Ingress protection	IP65
Material	Polycarbonate
Options	Illuminated keypad, steel armoured handset cord, sprial cord, without/without keypad




IntellyCom Station

Intercom station



Area classification	Weatherproof
Operating temp	-40°C to +60°C
Ingress protection	IP66
Material	Stainless steel
Weight	1.5kg approx
Options	With/without housing, one/three dialling keys




TAR 21 call relay

Connects signalling devices with telephones



Area classification	Weatherproof
Operating temp	-20°C to +60°C
Ingress protection	IP55
Material	Aluminium
Weight	0.75kg
Options	With call break bridging




AWS signalling bell

Weatherproof bell with telephone relay



Area classification	Weatherproof
Operating temperature	-20°C to +60°C
Ingress protection	IP55
Material	Housing: aluminium. Dome: steel
Entries	2 x M20
Weight	1.8kg - 3.3kg*
Voltage	230Vac
Sound output	Max: 110dB, 1m (±3dB)*
Options	Dome size




Industrial telephones and accessories


Protection housing




Area classification	Weatherproof
Operating temp	From -50°C to +70°C*
Material	Plastic, GRP, sheet steel, V4A
Weight	Depends on material
dB attenuation	16 & 26*
Options	Material, colours



Protection hoods



Area classification	Weatherproof
Material	GRP, DIN 5510, Class S4, Perforated plate metal, plastic, sheet steel* and stainless steel*
Weight	Depends on material
Noise insulation	25dB
Options	Material, colours, console




WP Twin LED

LED (Telephone) sounder / beacon combination unit



Area classification	Weatherproof
Operating temperature	-40°C to +65°C*
Ingress protection	IP66
Material	Seawater resistant aluminium body
Entries	2 x M20
Weight	1.8kg
Voltage	24Vdc, 115-230Vac
Sound output	Max: 102dB, 1m (±3dB)
Tones	8
Light source	LED
Options	Lens colour (clear, red, yellow green, blue)




Secondary telephone bell

For use as a secondary ringer



Operating temperature	-20°C to +40°C
Ingress protection	IP66
Material	Aluminium
Weight	0.5kg approx



*Model dependent