

MTL4850 and MTL4854 HART® Multiplexers

- Mount directly to a range of customised connection units
- MTL4850 designed for use with SIL3 loops (non interfering)
- MTL4854 designed for use in partial-stroke test valve positioner applications
- Connect over 2000 loops on one RS485 network
- Auto baud rate detection
- LED indication for fault diagnosis
- Isolated Power Supply
- Firmware upgradeable



The **MTL4850 HART multiplexer** provides a simple interface between smart devices in the field, control/safety systems and HART® instrument management software running on a PC.

The system is based on **32-channel modularity** to provide a compact, easily configurable and expandable system. Using a standard RS485 serial link, up to 2016 individual HART devices can be connected to a single network.

For the optimum solution, the modules mount directly to either a range of generic or customised connection units/backplanes.

The **MTL4850 is certified for the use with safety related sub-systems to IEC 61508**, and is the first choice of HART multiplexer for these applications. It can be connected to signal loops that are part of safety instrumented functions up to SIL3.

With the fixed modularity of **32 channels**, the speed of scanning field devices and responsiveness to PC software requests is optimised when compared to master/slave configurations.

The **MTL4854 mounts on the same range of backplane as the MTL4850** but includes four HART modems that enable simultaneous communications with connected field devices to be carried out. The primary application for this is to enable monitoring of other channels to continue while one channel is being used for valve positioner diagnostics.

Connectivity to HART Configuration and Instrument Management Software

The online access to the information contained within HART devices allows users to diagnose field device troubles before they lead to costly problems. Software can capture and use diagnostic data from HART field instruments via the MTL HART connection hardware. This allows users to realise the full potential of their field devices to optimise plant assets, which results in significant operations improvement and direct maintenance savings.

IMS products provide essential configuration, calibration, monitoring and maintenance history functions for conventional analogue (4-20 mA) and HART protocol compatible smart process instruments and field devices. They deliver powerful tools to meet the need for standardised instrument maintenance procedures and record keeping mandated by some quality standards and regulatory bodies.

The benefits of utilising these powerful software packages online include:

- Reduced commissioning time and costs
- Reduced maintenance costs
- Reduced documentation
- Reduced process downtime

The MTL4850/54 offers connectivity to a comprehensive range of FDT based software packages via the comms Device Type Manager (DTM). The DTM can be downloaded from www.mtl-inst.com. Other software packages work with the MTL4850/54 through custom software drivers or by the inclusion of the device description (DD) file for the MTL multiplexers.

HART® is a registered trademark of the HART Communication Foundation

MTL4850 and MTL4854 HART® Multiplexers

November 2022

SPECIFICATION

Number of channels

32

Channel transmitter type

HART rev 5 – 7

Channel interface

2 connections to each channel field loop (64 total)

Host system interface

RS485 2-wire multidrop

(up to 63 MTL4850 modules can be connected to one host)

RS485 baud rate

38400, 19200, 9600, 1200 baud - (auto-detected)

Address selection

8-bit interface, up to 64 addresses

Alarm output (Open Collector - Referenced to 0V)

$V_{max} = 35V$, $I_{max} = 5mA$, $P_{max} = 100mW$

ISOLATION

Channel-to-channel isolation

50V dc

Field loop isolation

50V dc

Module is coupled to loops via capacitor in each connection leg (i.e. 2 capacitors per channel)

RS485 interface isolation (Between module and interface)

25V dc

Alarm output isolation (Between module and output)

50V dc

PSU isolation (Between module and PSU input)

50V dc

POWER

Supply voltage

19V to 35V dc

Current consumption

MTL4850

60mA at 24V $\pm 10\%$

MTL4854

42mA at 24V $\pm 10\%$

Power dissipation

MTL4850

<1.6W at 24V $\pm 10\%$

MTL4854

<1.1W at 24V $\pm 10\%$

PSU protection

Reversed polarity protected

ENVIRONMENTAL

Temperature range

Operating: $-40^{\circ}C$ to $+70^{\circ}C$

Non-operating: $-40^{\circ}C$ to $+85^{\circ}C$

Relative humidity

5% to 95% - non-condensing

MECHANICAL

Dimensions

See drawing

Weight

MTL4850

125 gm

MTL4854

100 gm

Compatible FDT Frames include:-

FDT Frame	Manufacturer
FieldCare	Endress & Hauser/Metso Automation
PACTware	PACTware Consortium
FieldMate	Yokogawa
FDT Container	M&M Software


Approvals

For the latest certificate information,
see www.mtl-inst.com/certificates

LED INDICATORS

LED	Colour	State	Description
PWR	green	Off	Multiplexer is not receiving power
		On	Multiplexer is receiving power
FAULT	red	Off	Multiplexer is in the running state
		Steady flash	Multiplexer rebuild is in progress
		Short/long flash	No HART loops found
		On (steady)	A fault was detected and multiplexer operation has halted
HOST	yellow	Off	No communication on the channel
		Short flash (0.25 sec)	Correctly framed message received by the multiplexer
		Long flash (1 sec)	Response transmitted—this is re-triggerable so repeated transmissions will leave the indicator permanently on
HART	yellow	Off	No communication on the channel
		Short flash (0.25 sec)	Message transmitted
		Long flash (1 sec)	Response received- this is re-triggerable so repeated transmissions will leave the indicator permanently on

DIMENSIONS (mm)

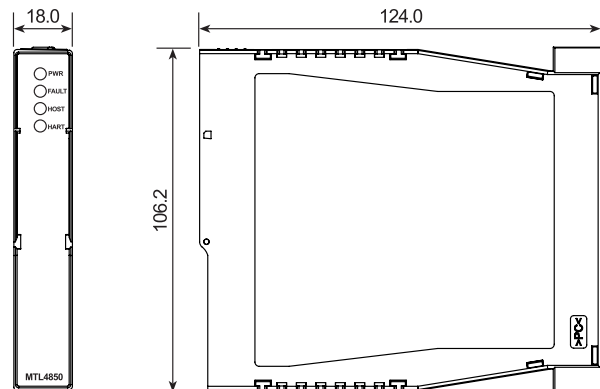

MTL4850 and MTL4854 HART® Multiplexers

November 2022

MTL4850/MTL4854 BACKPLANE SPECIFICATIONS GENERAL PURPOSE VERSIONS

HMP-HM64 BACKPLANE

Capacity

2 x MTL4850 or MTL4854 HART multiplexer modules

Maximum power requirements

2.9W when equipped with –

2 x MTL4850 or MTL4854 HART multiplexer modules

HART interface connectors

4 x DIN41651 20-way HART signal cables

(16 HART signal connections + 4 common returns on each cable. Connections to HART signals via screw terminal interface or custom backplane. Contact Eaton's MTL product line for details.)

Weight (excl. modules and accessories)

220g approx.

HTP-SC32 BACKPLANE *

Capacity

1 x MTL4850 or MTL4854 HART multiplexer module

Maximum power requirements

1.4W

Weight (excl. modules and accessories)

330g approx.

COMMON SPECIFICATION HMP-HM64 & HTP-SC32

Power requirements, Vs

21 to 35V dc through plug-in connectors

Mounting

Supplied fitted in DIN-rail (T- or G- section) carrier

RS485 port

2.5mm² screw terminals

Operating temperature

–40°C to +70°C

HCU16 HART CONNECTION UNIT*

Accuracy (HCU16-P250 only)

250Ω ±0.05%

Connectors

2.5mm² screw clamp terminals

3 terminals per channel

20-way HART signal cable (to HMP-HM64)

Weight

383g approx.

HCU16AO CONNECTION UNIT WITH FILTERS

Series impedance

dc < 2Ω

HART signal > 240Ω

Connectors

2.5mm² removable screw clamp terminals

2 terminals per channel in groups of 4 channels

20-way HART signal cable (to HMP-HM64)

Weight

768g approx.

COMMON SPECIFICATION HCU16 & HCU16AO

Capacity

16 channels



Isolation

Channel-to-channel 50V dc


Mounting

Supplied fitted in DIN-rail (T- or G- section) carrier


*For further details of the model options refer to the Instruction Manual INM4850 - available from the MTL website.

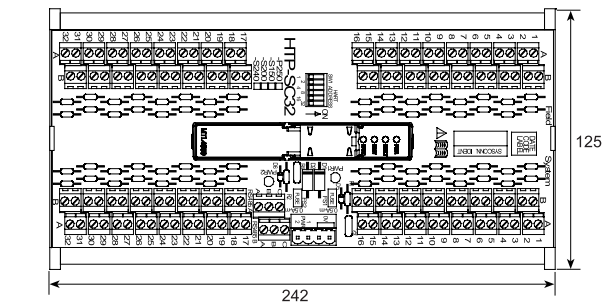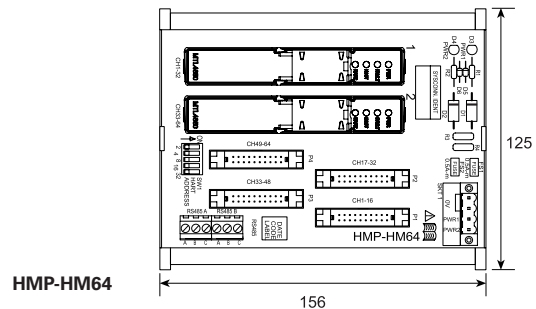

HTP-SC32

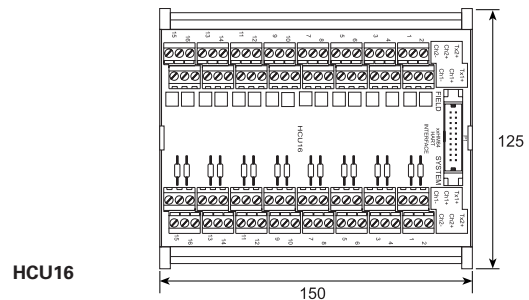

HCU16

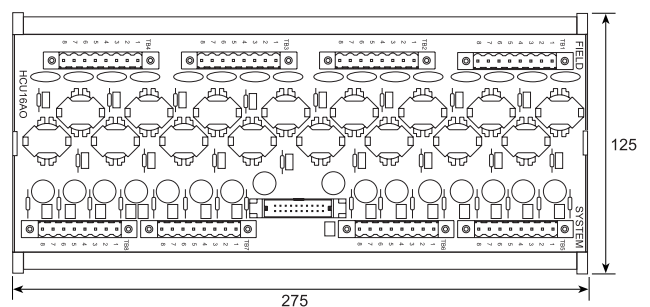

HCU16AO

CUSTOMISED CONNECTION UNITS

MTL offers a range of general purpose and IS interfaces providing direct connection with control system I/O cables as well as HART® connectivity. For general purpose signals, a number of custom HART® interface termination units are available for most DCS and PLC I/O cards. These replace the existing DCS termination units, saving space and allowing easy upgrading. Please contact MTL product line for details.

MTL4850 and MTL4854 HART® Multiplexers

November 2022

MTL4850/54 BACKPLANE SPECIFICATIONS INTRINSIC SAFETY VERSIONS

CPH-SC16/CPH-SC32 BACKPLANES

Capacity

- 16 x MTL4541/A, MTL4546/Y isolators
- 16 x MTL4544/A, MTL4549/Y (CPH-SC32 only)
- 1 x MTL4850 or MTL4854 HART multiplexer

Power requirements, Vs

- 21 to 35V dc through plug-in connectors

Maximum power requirements

- CPH-SC16 0.65A
- CPH-SC32 1.2A

Safe-area connectors

- 2.5mm² screw terminals (2 terminals/module)

RS485 port

- 2.5mm² screw terminals


Accuracy

- CPH-SCxxR: 250Ω ±0.05% conditioning resistor


Weight (excl. modules and accessories)

- CPH-SC16 410g approx.
- CPH-SC32 470g approx.

DIMENSIONS (mm)

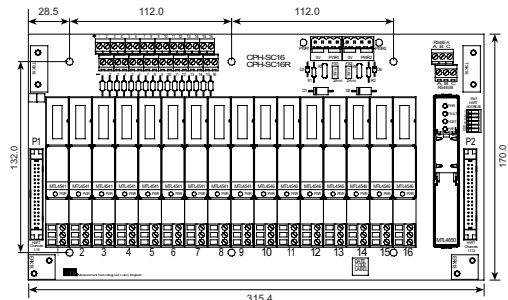

CPH-SC16(R)

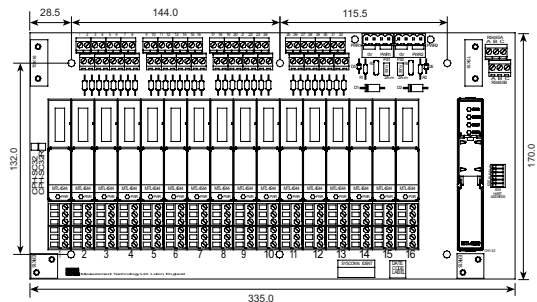

CPH-SC32(R)

ORDERING INFORMATION

HART multiplexer

MTL4850

HART multiplexer module
(connects with up to 32 loops)

MTL4854

Multi-modem HART multiplexer module
(connects with up to 32 loops)

General purpose connection units

HMP-HM64

64ch HART backplane
(Link to connection units via signal cable)

HCU16 †

HART connection unit, 16ch i/p

HCU16-P250 †

HART connection unit, 16ch i/p

HCU16-S150 †

HART connection unit, 16ch i/p

HCU16-S200 †

HART connection unit, 16ch i/p

HCU16AO

HART connection unit, 16ch o/p
(With HART filters)

HM64RIB20-xx

20-way HART signal cable
xx = 0.5, 1.0, 1.5, 2.0, 3.0, 4.0, 4.5, 6.0
(metres)

Integrated connection units

HTP-SC32 †

Integrated HART connection unit, 32ch

HTP-SC32-P250 †

Integrated HART connection unit, 32ch

HTP-SC32-S150 †

Integrated HART connection unit, 32ch

HTP-SC32-S200 †

Integrated HART connection unit, 32ch

HTP-SC32-S240 †

Integrated HART connection unit, 32ch

† See Notes

MTL4500 range of backplanes

CPH-SC16

16ch backplane

CPH-SC16R

16ch backplane
(250Ω conditioning resistor)

CPH-SC32

32ch backplane

CPH-SC32R

32ch backplane
(250Ω conditioning resistor)

Literature

INM4850/54

MTL4850/54 Instruction manual

INA485x

ATEX safety instructions

Notes:

- no suffix** No parallel resistor, 0Ω link in series - for use with current inputs with 250Ω input impedance or HART compatible outputs
- P250** 250Ω parallel resistor, 0Ω link in series - for use with 1-5V system inputs
- S150** 150Ω series link, no parallel resistor - for use with current inputs with 100Ω input conditioning
- S200** 200Ω series link, no parallel resistor - for use with current inputs with 50Ω or 63.5Ω input conditioning
- S240** 240Ω series link, no parallel resistor - for use with isolators connected to field terminals.



Eaton Electric Limited,
Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtlenquiry@eaton.com
www.mtl-inst.com

© 2022 Eaton
All Rights Reserved
Publication No. EPS MTL4850_54 Rev 4 101122
November 2022

EUROPE (EMEA):
+44 (0)1582 723633
mtlenquiry@eaton.com

THE AMERICAS:
+1 800 835 7075
mtl-us-info@eaton.com

ASIA-PACIFIC:
+65 6 645 9888
sales.mtlasing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

MTL4851 and MTL4852

HART® connection systems

- Designed to mount directly to a range of general purpose HART® connection units and IS backplanes
- Provides a simple interface to smart devices in the field
- Connect up to 7936 HART® devices on a single RS485 network
- LED indication for fault diagnosis
- Auto baud rate detection
- Connectivity to HART® configuration and Instrument Management software (IMS)



The MTL4851 and MTL4852 HART connection system provides a simple interface between smart devices in the field, control systems and HART instrument management software run on a pc.

The system is based on 16-channel modularity to provide a compact, easily configurable and expandable system. Using a standard RS485 serial link up to 7936 HART devices can be connected on a single network.

For the optimum solution, choose from a range of general purpose and IS termination boards. For maximum flexibility the HMM64 HART backplane locates an MTL4851 master communications module and up to three MTL4852 secondary interface modules, with each module connecting to 16 field devices. General purpose HART connection units and IS backplanes are available fitted with an cable interface connection to the HMM64. This system can be extended with further HMS64 HART backplanes linked to the master, each carrying up to four MTL4852 secondary interface modules.

The MTL4851 and MTL4852 modules can also be located on HTP-SC16x termination boards for general purpose applications. HART loops are simply wired through these HART Termination Panels and may be grounded or floating circuits. The HTP boards offer a compact and cost-effective solution for general applications. CPH-SC16x backplanes are ideal for signal loops requiring intrinsic safety (IS) protection, combining multiplexer and IS isolator mounting. This offers considerable simplification in wiring when compared to DIN-rail based solutions.

The HCU16 HART units connect to 16 general purpose field instruments while maintaining channel to channel isolation. Resistor conditioning options are compatible with all types of I/O cards. It allows pass-through connections for transmitter power supply, input signal and common.

The HCU16AO unit includes HART filters for use with I/O cards that are incompatible with HART communication signals.

Customised backplanes and connection units are available to provide direct connection from DCS I/O cables, replacing the standard termination boards.

See also the MTL4850 datasheet for alternative HART solutions using a 32 channel multiplexer module ideally suited for use in conjunction with emergency shutdown and safety systems.

Connectivity to HART Configuration and Instrument Management Software :

The online access to the information contained within HART devices allows users to diagnose field device troubles before they lead to costly problems. Software can capture and use diagnostic data from HART field instruments via the MTL HART connection hardware. This allows users to realise the full potential of their field devices to optimise plant assets, which results in significant operations improvement and direct maintenance savings.

IMS products provide essential configuration, calibration, monitoring and maintenance history functions for conventional analogue (4-20 mA) and HART protocol compatible smart process instruments and field devices. They deliver powerful tools to meet the need for standardised instrument maintenance procedures and record keeping mandated by some quality standards and regulatory bodies.

The benefits of utilising these powerful software packages online include:

- Reduced commissioning time and costs
- Reduced maintenance costs
- Reduced documentation
- Reduced process downtime


The MTL485x offers connectivity to a comprehensive range of FDT based software packages via the comms Device Type Manager (DTM). The DTM can be downloaded from www.mtl-inst.com. Other software packages, such as AMS from Emerson, work with the MTL485x through custom software drivers or by the inclusion of the device description (DD) file for the MTL multiplexers.

HART® is a registered trademark of the HART Communication Foundation

MTL4851 and MTL4852 HART® Connection Systems

November 2022

SYSTEM OVERVIEW (TYPICAL INSTALLATION)

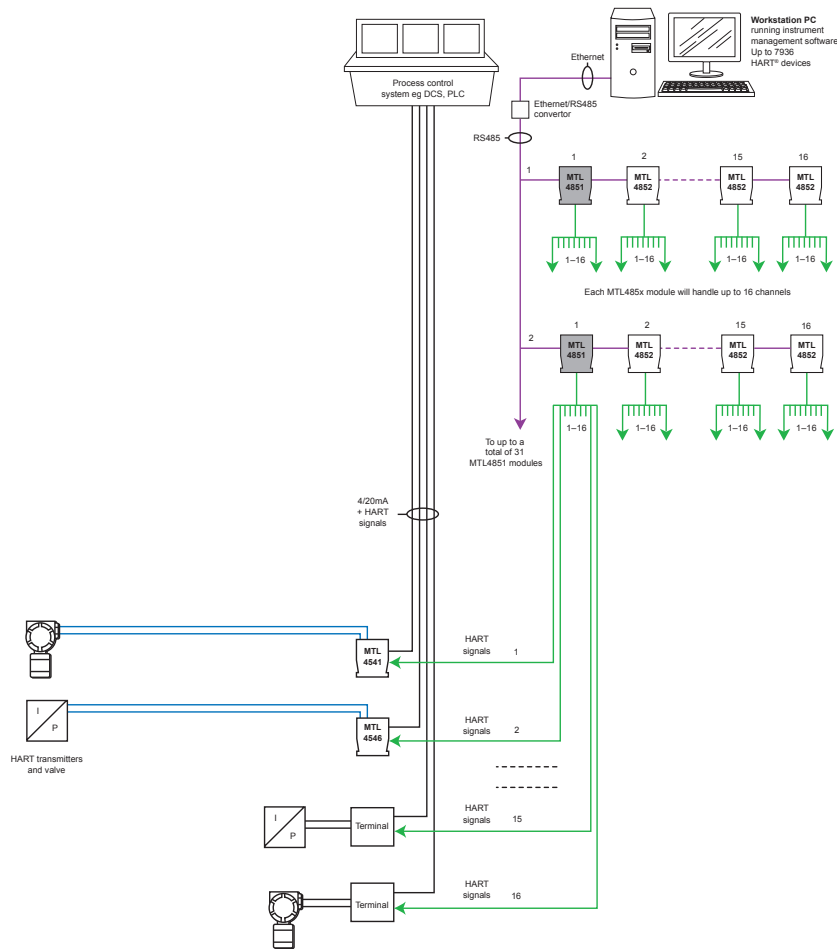

LED INDICATORS - MTL4851 module

LED	Colour	State	Description
PWR	green	Off	Multiplexer is not receiving power
		On	Multiplexer is receiving power
FAULT	red	Off	Multiplexer is in the running state
		Pulsing	Multiplexer build/rebuild is in progress
		Blinking	No HART loops found
		On (steady)	A fault was detected and multiplexer operation has halted
HOST	yellow	Off	No communication on the RS485 channel
		Short flash (0.25 sec)	Correctly framed message received by the multiplexer
		Long flash (1 sec)	Response transmitted—this is re-triggerable so repeated transmissions will leave the indicator permanently on
HART	yellow	Off	No communication on the channel
		Short flash (0.25 sec)	Message transmitted
		Long flash (1 sec)	Response received- this is re-triggerable so repeated transmissions will leave the indicator permanently on

LED INDICATORS - MTL4852 module

LED	Colour	State	Description
PWR	green	Off	Unit is not receiving power
		On	Unit is receiving power
HART	yellow	Pulsing	Indicating a channel is selected
		On	Channel continuously selected

MTL4851 and MTL4852 HART® Connection Systems

November 2022

SPECIFICATION

MTL4851 Master Communications Module

Number of HART channels

16 (ch1 to ch16)

Channel device type

HART rev 5-7

Channel interface

2 connections to each channel

Host system interface

RS485 2-wire multidrop

(up to 31 MTL4851 modules can be connected to one host)

RS485 baud rate

38400, 19200, 9600, 1200 baud- auto detected

Address selection

up to 31 addresses, set on backplane

Alarm output

Open-collector transistor, referenced to 0V

$V_{\max} = 35V$, $I_{\max} = 5mA$, $P_{\max} = 100mW$

MTL4852 Secondary Interface Module

Number of HART channels

16 (ch17 to ch256 in 16 channel groups)

Channel device type

HART rev 5-7

Channel interface

2 connections to each channel

MTL systems interface

Up to 15 off MTL4852 modules per MTL4851

Total length of interface bus, 4m max.

Power requirements

Powered from MTL4851 module

ISOLATION

Channel-to-channel isolation

50V dc

Field loop isolation

50V dc

Module is coupled to loops via capacitor in each connection leg (i.e. 2 capacitors per channel)

RS485 interface isolation (Between module and interface)

50V dc

Alarm output isolation (Between module and output)

50V dc

PSU isolation (Between module and PSU input)

50V dc

POWER SUPPLY, MTL4851 (from backplane)

Supply voltage

19V to 35V dc

Current consumption

42mA at 24V $\pm 10\%$ for MTL4851, plus 2mA for each MTL4852

Power dissipation (MTL4851 + 15 MTL4852)

<1.6W at 24V $\pm 10\%$

PSU protection

Reversed polarity protected

ENVIRONMENTAL

Temperature range

Operating: $-40^{\circ}C$ to $+60^{\circ}C$

Non-operating: $-40^{\circ}C$ to $+85^{\circ}C$

Relative humidity

5% to 95% - non-condensing

MECHANICAL

Dimensions

See drawing

Weight


MTL4851 95gm

MTL4852 75gm

Approvals

For the latest certificate information, see www.mtl-inst.com/certificates

DIMENSIONS (mm)

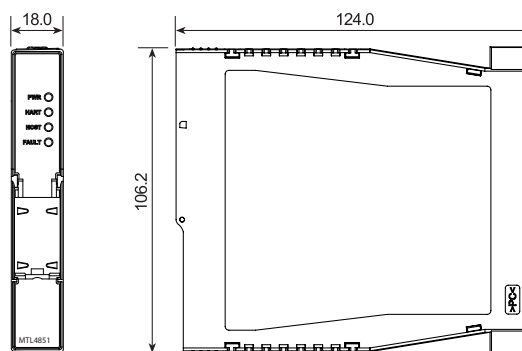

INSTRUMENT MANAGEMENT SOFTWARE

The MTL HART Connection System offers connectivity to a comprehensive range of both general instrument management software packages and dedicated software packages for optimising Valve positioner performance and maintenance including-

AMS Device Manager	Emerson Process Management
Cornerstone	ASTEC
DAT200 Asset Vision Basic	ABB
FDM	Honeywell
FDT Container	M&M Software
FieldCare	Endress & Hauser/Metso Automation
Fieldmate	Yokogawa
HART OPC Server	HART Communication Foundation
PACTware	PACTware Consortium
PDM	Siemens
SoftTools	Flowserve
ValveLink	Emerson Process Management
Valvue	Masoneilan




For software packages that are based on a FDT frame i.e FieldCare, PACTware etc communication with the MTL HART multiplexer system requires the MTL Generic Communications DTM. This can be downloaded Free of Charge from the MTL website.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

MTL4851 and MTL4852 HART® Connection Systems

November 2022

BACKPLANES FOR MTL4851/MTL4852 GENERAL PURPOSE VERSIONS

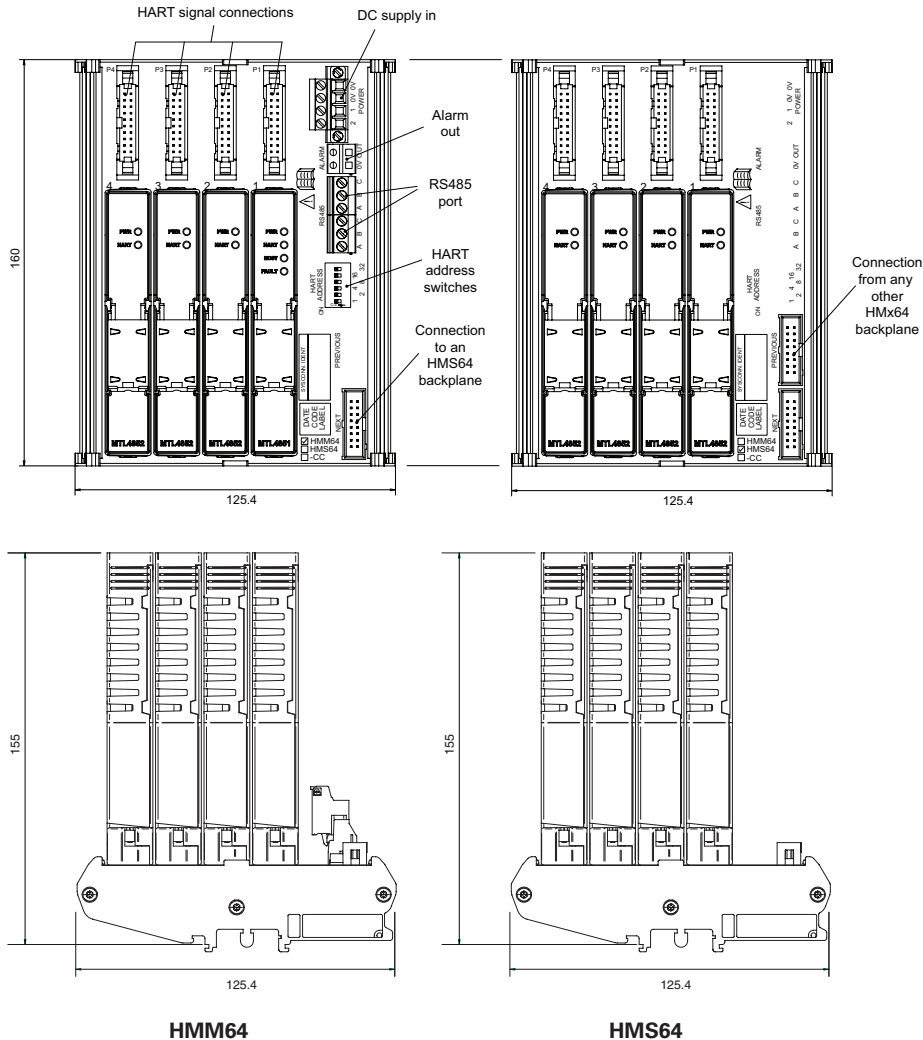

HMM64/HMS64 BACKPLANE

Capacity

- HMM64 1xMTL4851, 3xMTL4852
- HMS64 4xMTL4852
- Max. 3xHMS64 connected to 1xHMM64

Maximum power requirements

- 1.9W for fully equipped HMM64, plus
- 3 HMS64 backplanes.

HART interface connectors

- 4xDIN41651 20-way HART signal cables
- (16 HART signal connections + 4 common returns)
- For use with HM64RIB20 cables

Backplane inter-connect

- HMM64 1x DIN41651 16-way socket
- HMS64 2x DIN41651 16-way socket
- For use with HMRIB16 cables

Weight (excl. modules)

215g approx.

Power requirements, Vs

- 21 to 35V dc through plug-in connectors, screw-secured
- 4 terminals for dual power supplies

RS485 port

- 2 terminals for bus, plus screen terminal
- 6 terminals in total to enable chained bus connection.
- HART address switch, five poles active in six position switch

Alarm connectors

- 2 terminals for alarm output and alarm clear

Conductor terminals


- Accept conductors of up to 2.5mm² stranded or single-core

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

MTL4851 and MTL4852 HART® Connection Systems

November 2022

BACKPLANES FOR MTL4851/MTL4852 GENERAL PURPOSE VERSIONS

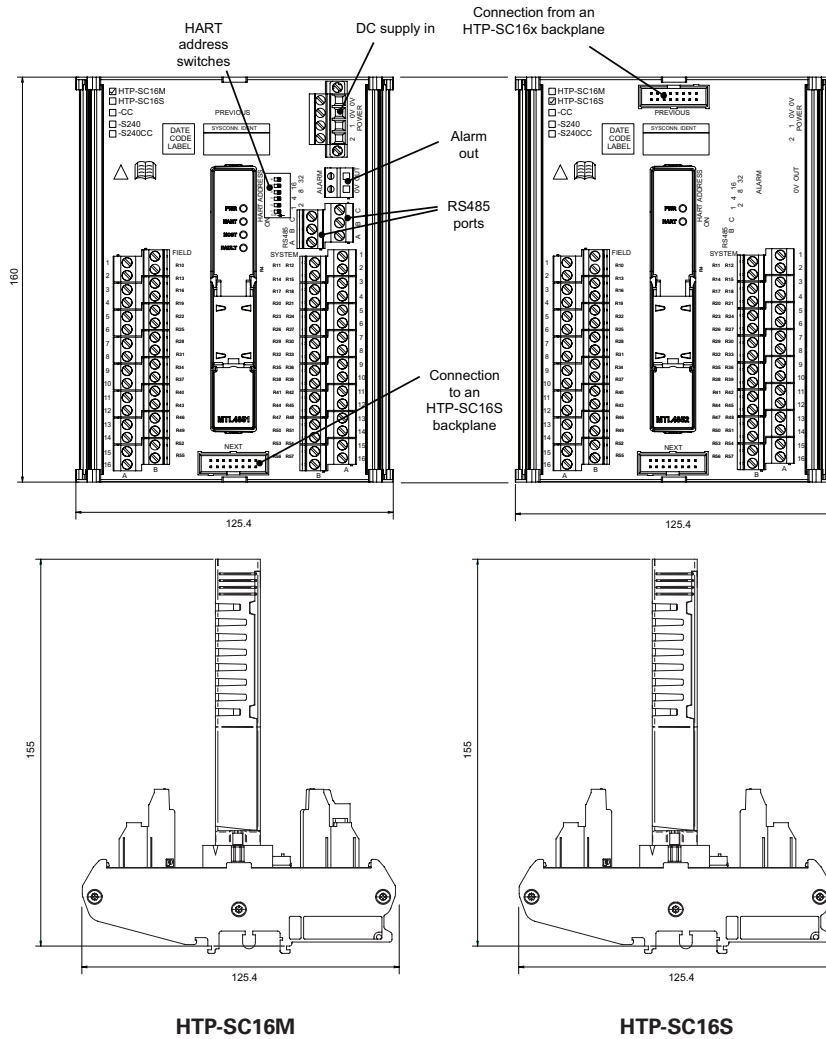

HTP-SC16M/HTP-SC16S BACKPLANE *

Capacity

HTP-SC16M 1xMTL4851
HTP-SC16S 1xMTL4852
Max. 4xHTP-SC16S connected to 1xHTP-SC16M

Maximum power requirements

1.3W for HTP-SC16M, plus
4 HTP-SC16S backplanes.

Signal connectors

2.5mm² screw-clamp terminals
2 terminals per channel for field and system

Backplane inter-connect

HTP-SC16M 1x DIN41651 16-way socket
HTP-SC16S 2x DIN41651 16-way socket
For use with HMRIB16 cables

Weight (excl. modules)

300g approx.

Power requirements, Vs

21 to 35V dc through plug-in connectors, screw-secured
4 terminals for dual power supplies

RS485 port

2 terminals for bus, plus screen terminal
6 terminals in total to enable chained bus connection.
HART address switch, five poles active in six position switch

Alarm connectors

2 terminals for alarm output and alarm clear

Conductor terminals

Accept conductors of up to 2.5mm² stranded or single-core

* for further details of the model options refer to the Instruction Manual INM4851 - available from the MTL website.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.


BACKPLANES FOR MTL4851/MTL4852
GENERAL PURPOSE VERSIONS

HCU16 HART CONNECTION UNIT*

Accuracy (HCU16-P250 only)
250Ω ±0.05%

Connectors
2.5mm² screw-clamp terminals
3 terminals per channel
20-way HART signal cable (to HMM64/HMS64)

Weight
383g approx.

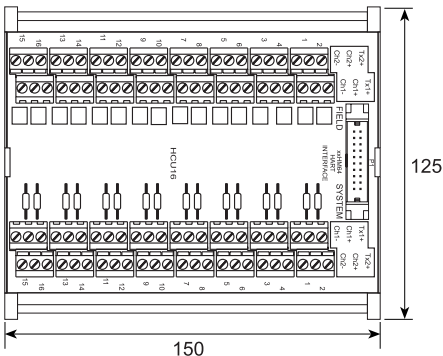


HCU16

HCU16AO CONNECTION UNIT WITH FILTERS

Series impedance
dc < 2Ω
HART signal > 240Ω

Connectors
2.5mm² removable, screw-clamp terminals
2 terminals per channel in groups of 4 channels
20-way HART signal cable (to HMM64/HMS64)

Weight
768g approx.

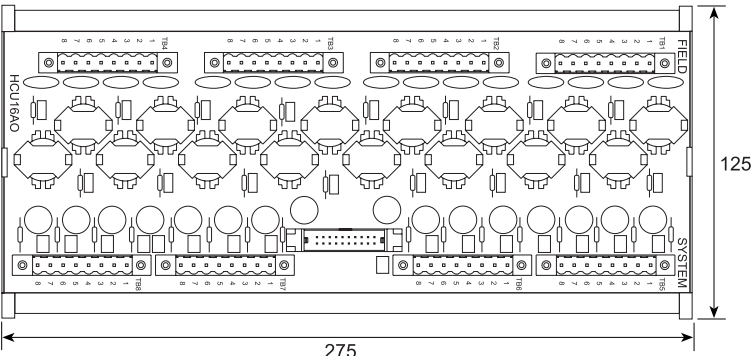

HCU16AO

COMMON SPECIFICATION HCU16 & HCU16AO

Capacity
16 channels

Isolation
Channel-to-channel 50V dc

Mounting
Supplied fitted in DIN-rail (T- or G- section) carrier

* for further details of the model options refer to the Instruction Manual
INM4851 - available from the MTL website.

CUSTOMISED CONNECTION UNITS

Eaton offers a range of general purpose and IS interfaces providing direct connection with control system I/O cables as well as HART® connectivity. For general purpose signals, a number of custom HART® interface termination units are available for most DCS and PLC I/O cards. These replace the existing DCS termination units, saving space and allowing easy upgrading.

Typical system examples are:

Emerson	DeltaV and DeltaV SIS systems
HIMA	HiMax
Honeywell	Experion C300, Safety Manager, Process Manager I/O systems
Invensys	Foxboro FBM systems, Triconex Tricon & Trident systems
Siemens	ET200M
Yokogawa	Centum R3, Prosafe RS systems


Contact Eaton's MTL product line with details of your specific requirements.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

MTL4851 and MTL4852 HART® Connection Systems

November 2022

BACKPLANES FOR MTL4851/MTL4852 INTRINSIC SAFETY VERSIONS

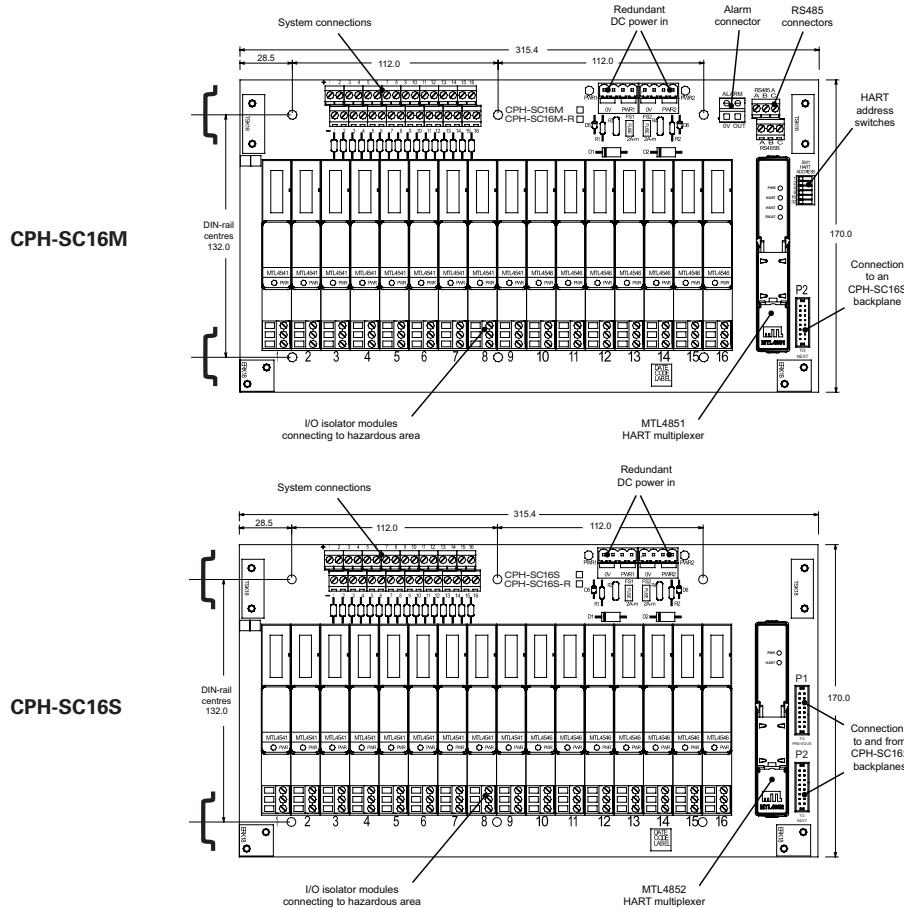

CPH-SC16M/CPH-SC16S BACKPLANES

Capacity

CPH-SC16M 1xMTL4851
CPH-SC16S 1xMTL4852
16 x MTL4541/A/S/AS, MTL4546/Y isolators
Max. 4xCPH-SC16S connected to 1xCPH-SC16M

Power requirements, Vs

21 to 35V dc through plug-in connectors,
2 x 4 terminals for dual power supplies and power chain
Dual 2.5A medium blow TE5 fuses

Maximum power requirements

CPH-SC16M 0.65A
CPH-SC16S 0.6A

Safe-area signal connectors

2.5mm² screw-clamp terminals
2 terminals per channel for system connections

Backplane inter-connect

CPH-SC16M 1x DIN41651 16-way socket
CPH-SC16S 2x DIN41651 16-way socket
For use with HMRIB16 cables

RS485 port

2 terminals for bus, plus screen terminal
6 terminals in total to enable chained bus connection.
HART address switch, five poles active in six position switch

Alarm connectors

2 terminals for alarm output and alarm clear

Accuracy

CPH-SC16xR: 250 Ω \pm 0.05% conditioning resistors
(note: MTL4541/41A only)

Weight (excl. modules and accessories)

410g approx.

* for further details of the model options refer to the Instruction Manual INM4851 - available from the MTL website.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

MTL4851 and MTL4852 HART® Connection Systems

November 2022



HART multiplexer

MTL4851	HART multiplexer primary module
MTL4852	HART multiplexer secondary module

Multiplexer accessories


TH5000	Tag holder (Pack of 20)
ET-485	Serial RS485 to Ethernet converter

General purpose connection units



HMM64	64ch HART backplane for 1xMTL4851 & 3xMTL4852
HMS64	64ch HART backplane for 4xMTL4852
HCU16 †	HART connection unit, 16ch
HCU16-P250 †	HART connection unit, 16ch
HCU16-S150 †	HART connection unit, 16ch
HCU16-S200 †	HART connection unit, 16ch
HCU16AO	HART connection unit, 16ch o/p (With HART filters)

Integrated connection units




HTP-SC16M	Integrated HART connection unit, primary, 16ch
HTP-SC16M-S240	Integrated HART connection unit, 16ch, 240Ω series resistor
HTP-SC16S	Integrated HART connection unit, secondary, 16ch
HTP-SC16S-S240	Integrated HART connection unit, 16ch, 240Ω series resistor

HART Backplane accessories

RIB-CLIP16	Retaining clip for ribbon cable connector (pack of 10)
HM64RIB20-xx	20-way HART signal cable xx = 0.5, 1.0, 1.5, 2.0, 3.0, 4.0, 4.5, 6.0 (metres)
HMRIB16-xx	16-way backplane linking cable xx = 0.5, 1.0, 2.0 (metres)

† See Notes



MTL4500 range of backplanes

CPH-SC16M	16ch backplane, primary
CPH-SC16M-R	16ch backplane, (250Ω conditioning resistor)
CPH-SC16S	16ch backplane, secondary
CPH-SC16S-R	16ch backplane, (250Ω conditioning resistor)

Backplane accessories for MTL4500 range

DMK01	DIN-rail mounting kit, T- or G-section (pack of 40)
SMS01	Surface mounting kit (pack of 40) 16-way backplanes require 6
ERK18	Earth rail kit
TSK18	Tagging strip kit
FUS2.5ATE5	Fuse kit, pack of 10, 2.5A

Literature

INM4851	MTL4851 Instruction manual
INA485x	ATEX safety instructions

Notes:

no suffix	No parallel resistor, 0Ω link in series - for use with current inputs with 250Ω input impedance or HART compatible outputs
-P250	250Ω parallel resistor, 0Ω link in series - for use with 1-5V system inputs
-S150	150Ω series link, no parallel resistor - for use with current inputs with 100Ω input conditioning
-S200	200Ω series link, no parallel resistor - for use with current inputs with 50Ω or 63.5Ω input conditioning
-S240	240Ω series link, no parallel resistor - for use with isolators connected to field terminals.